


# STANDARD HORIZON

## STANDARD HORIZON CP190i, CPF190i, CP390i, CP590 & CPN Series wiring to MATRIX AIS+ GX2150

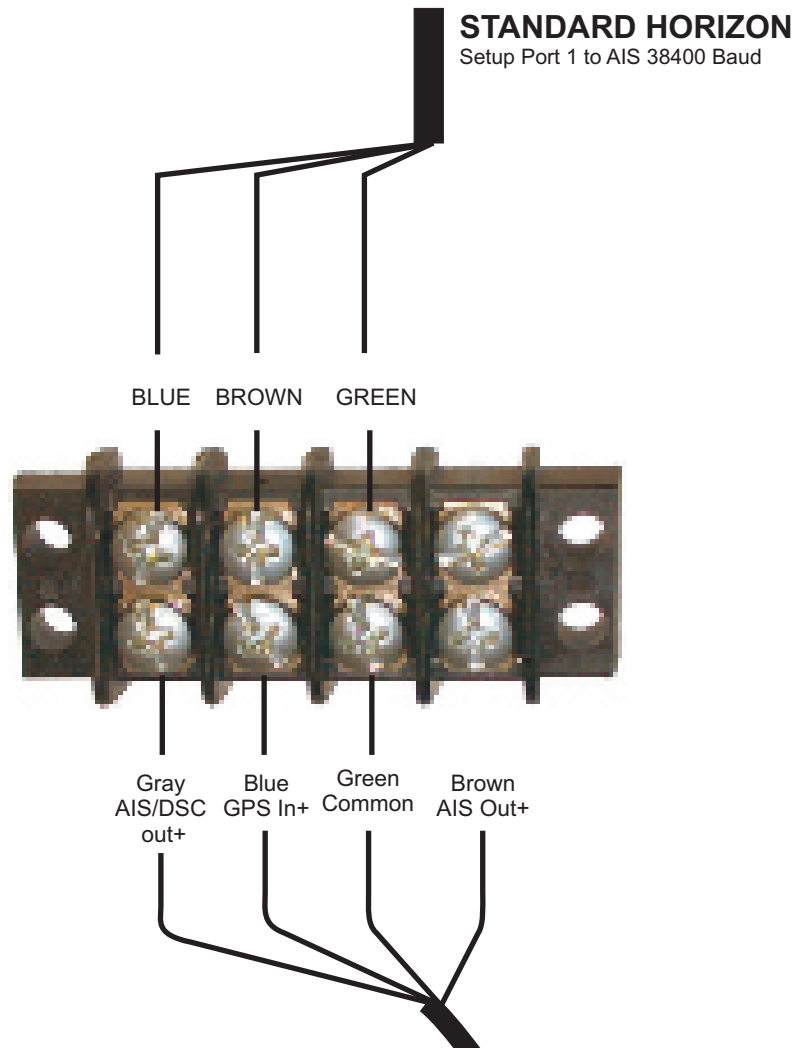

### GX2150 - Baud Rate Selection (change to 38400)

1. Press and hold down the **CALL** key until "Setup Menu" appears, then select "GENERAL SETUP" with the **CHANNEL** knob.
2. Press the **SELECT** soft key, then rotate the **CHANNEL** knob to select "NMEA DATA IN/OUT".
3. Press the **SELECT** soft key.
4. Rotate the **CHANNEL** knob to select the desired baud rate.
5. Press the **ENT** soft key to store the selected baud rate.
6. Press the **QUIT** soft several times to return to radio operation.

